

RTV

KUBOTA 4WD PETROL UTILITY VEHICLE

RTV500

For Earth, For Life
Kubota




*This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.

The all-new RTV500—advanced technology from Kubota delivers exceptional performance and reliability in a compact size.

Whether you're tending a park, hunting in the woods, or simply roaming your property, let Kubota's new RTV500 take you wherever you need to go. This quiet utility vehicle features Kubota's new liquid-cooled EFI Petrol engine, a new variable hydrostatic transmission, and more—all packed into a compact body. Used for a variety of applications, it's powerful and rugged enough to handle hills and uneven terrain, yet it can fit onto a full-size pickup truck, so you can take it with you. With all of this and more, you can rest assured that the high-performance RTV500 is always at the ready, no matter where you want to go.

Kubota Liquid-cooled EFI Petrol Engine

The RTV500's new 15.8-horsepower, 2-cylinder Kubota petrol engine is liquid-cooled to ensure reliability and minimize noise and vibration, reducing operator fatigue and increasing efficiency. The engine features an Electronic Fuel Injection (EFI) system that provides on-demand power, optimizes acceleration and enhances quiet operability. Plus, the EFI eliminates the need to adjust the carburetor—enabling better engine start-up in cold weather or after long-term storage, and improving engine serviceability.

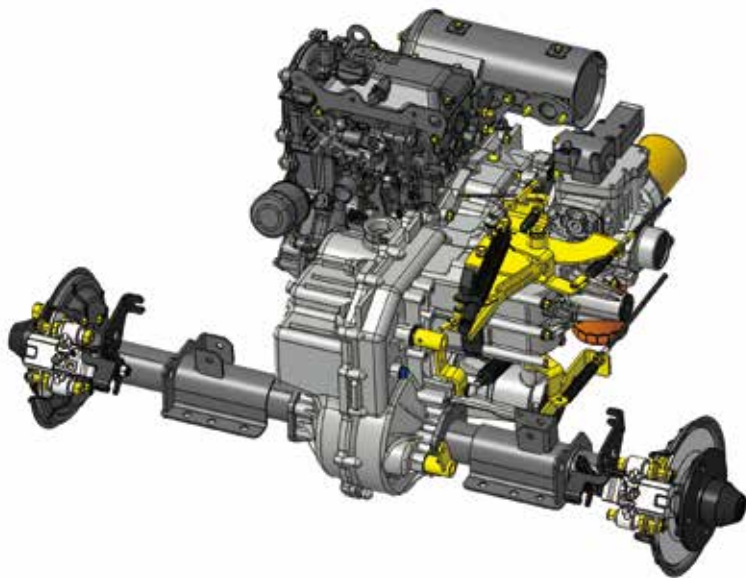

VHT Plus (Variable Hydro Transmission)

Kubota's exclusive and innovative hydrostatic transmission eliminates the need to adjust belt drives and provides the RTV500 with an exceptional level of performance, handling, and reliability under tough conditions. Ride the hills with quick acceleration and smooth, engine-assisted deceleration. In addition, the VHT offers outstanding traction and impressive power, providing the muscle to take you almost anywhere.



Standard Frame-integrated ROPS



Shown with optional front guard.

nce



**Smooth, Reliable
Semi-independent
Rear Suspension**

Comfortable Operator Area

Get in and get going. The RTV500 features ergonomic, well-placed controls for easy operation, and a comfortable seat, so both the driver and passenger can enjoy a full day of work or play without fatigue. The low operator platform offers ample and obstacle-free legroom, so it's simple to step on or off.

Designed for Convenient Transportation

Kubota specifically designed the RTV500's compact frame to make it easy to load onto a full-size pickup truck or trailer, so you can take it wherever you go. It's ideal for camping, hunting, or any rugged outdoor adventure.



KUBOTA UTILITY VEHICLE

RTV500

Specifications

| Model | | RTV500 | |
|---------------------------------------|----------------------------------|--|------------------|
| Engine | Make | KUBOTA GZ460F-E3-UV | |
| | Type | 2-Cylinder, 4-cycle, Petrol, OHC, water-cooled, EFI | |
| | Displacement | cc | 456 |
| | Horsepower | HP (kW)/rpm | 15.8 (11.8)@3600 |
| Exhaust system | | Muffler with screen-type spark arrestor | |
| Fuel tank capacity | | ℓ | 20 |
| Transmission | | Variable hydro transmission (VHT) | |
| Max. Traveling speed | | km/h | 40 |
| Wheels, drive system | | Rear 2WD or 4WD Selection | |
| Differential lock | | Standard; hand operated with mechanical holder | |
| Gear selection | | Hi-Lo range forward, neutral, reverse | |
| Brakes | Front / Rear | Dry-disc brakes | |
| | Parking brake | Rear wheel, hand lever | |
| Steering | | Rack & Pinion | |
| Suspension | | Independent, Mac-Pherson strut-type / Semi-independent, Multi-link | |
| Dimensions | Length | mm | 2690 |
| | Width | mm | 1390 |
| | Height, overall | mm | 1829 |
| | Front tread centers | mm | 1016 |
| | Rear tread centers | mm | 1041 |
| | Wheelbase | mm | 1800 |
| | Ground clearance front/rear axle | mm | 205 / 175 |
| | Turning diameter | m | 2.13 |
| Max. rolling weight (Towing capacity) | | kg | 500 |
| Payload capacity | | kg | 430 |
| Weight | | kg | 620 |
| Cargo bed | Width Length Depth | mm | 1032 × 856 × 290 |
| | Volume | m ³ | 0.25 |
| | Bed height (unloaded) | mm | 810 |
| | Cargo bed load | kg | 200 |
| Sound level, operator ear | | A | 83 |
| Tyres | Front | 24 × 9-12 HDWS, 6PLY | |
| | Rear | 24 × 11-12 HDWS, 6PLY | |
| Body color | | Orange | |
| Speedometer | | Opt. | |
| Front guard | | Opt. | |
| Headrest | | Opt. | |

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty and safety information. The values in "Ground clearance" and "Weight" are those of the machine equipped with the tires in the table above. Some RTVs in this brochure are shown with optional accessories. For off-highway use only.



©2017 Kubota Corporation

Kubota Australia Pty Ltd

25-29 Permas Way, Truganina VIC, 3029 Australia
 Freecall: 1800-334-653
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

CB Norwood Distributors Ltd

888 Tremaine Avenue, Palmerston North, 4440 New Zealand
 Tel: 06-356-4920
 Email: info@norwood.co.nz

Web Site: <http://www.kubota.co.nz>

Kubota
Genuine Parts
 for maximum
 performance,
 durability and
 safety

